




Chrysler, Jeep, Dodge SCL / ESL emulator

for LIN based systems: SKREEM,
WIN

(green connector)

Purpose:

For Chrysler / Jeep / Dodge cars, original SCL (steering column lock) replacement. Self teaching (plug & play), no alignment / teaching necessary.

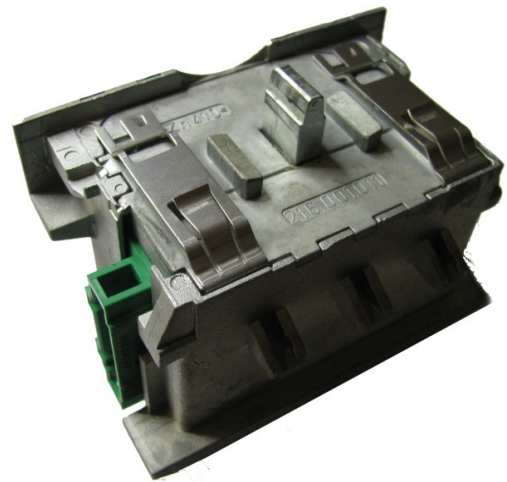


SCL pinout for emulator connection:

- pin1: **+12v**
- pin2: **GND**
- pin3: not used
- pin4: **LIN** line

Emulator pins are marked on opposite side of board.

1 2 3 4

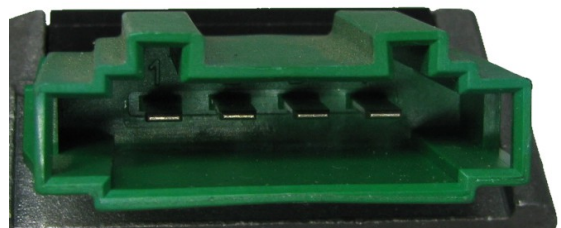

LED on board:

- power ON: short blink,
- request to UNLOCK: one blink,
- request to LOCK: two blinks.